



IP65

IK10

CLASS  
I

C E

# MAGNUM HALO

A contemporary, IP65 LED bulkhead with an indirect halo light effect.

Suitable for either interior or exterior use, it is also available with a microwave sensor for enhanced energy savings.

# MAGNUM HALO

## FEATURES & BENEFITS

- > Attractive halo backlight
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance
- > Choice of decorative trims
- > High impact resistance

## PERFORMANCE



Light source	LED
Luminaire output	1450 - 2350lm
Luminaire efficiency	≥96lm/W
CRI	>80

## MATERIALS

Body	UV resistant plastic
Finish	White / Matt silver
Diffuser	Opal polycarbonate TP(a)

## OPTIONS

- > Microwave sensor for enhanced energy savings
- > Bluetooth enabled

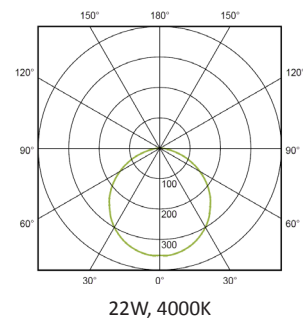

LAMP	COLOUR TEMP	DELIVERED LUMENS	FINISH	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
15W	3000K	1450lm	White	70403301	70403303	70403391	70403393
15W	4000K	1550lm	White	70403401	70403403	70403491	70403493
15W	3000K	1450lm	Matt silver	70403501	70403503	70403591	70403593
15W	4000K	1550lm	Matt silver	70403601	70403603	70403691	70403693
22W	3000K	2200lm	White	70402901	70402903	70402991	70402993
22W	4000K	2350lm	White	70403001	70403003	70403091	70403093
22W	3000K	2200lm	Matt silver	70403101	70403103	70403191	70403193
22W	4000K	2350lm	Matt silver	70403201	70403203	70403291	70403293



 IP65 IK10 CLASS I CE

# SAMARA LED

A robust, vandal resistant, IP65 LED luminaire with a high luminous efficiency making it ideal for corridors, stairwells, store cupboards and bathrooms.

# SAMARA LED

## FEATURES & BENEFITS

- > Easy to install with secure components and hinged diffuser
- > No spotting - even light distribution
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance
- > UV stabilised - no yellowing



## PERFORMANCE



Light source	LED
Luminaire output	1350 - 2550lm
Luminaire efficiency	≥100lm/W
CRI	>80

## MATERIALS

Body	Polycarbonate
Finish	White
Diffuser	Opal polycarbonate TP(a)

## OPTIONS

- > Microwave sensor for enhanced energy savings
- > Bluetooth enabled

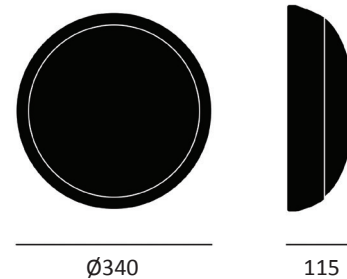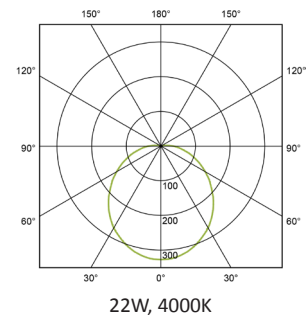

LAMP	COLOUR TEMP	DELIVERED LUMENS	STANDARD	DALI	EMERGENCY	
					STANDARD	DALI
13W	3000K	1350lm	40100101	40100103	40100191	40100193
13W	4000K	1450lm	40100201	40100203	40100291	40100293
22W	3000K	2350lm	40100301	40100303	40100391	40100393
22W	4000K	2550lm	40100401	40100403	40100491	40100493

## TRITON LED



## FEATURES &amp; BENEFITS

- > Choice of white or silver finish
- > Long rated LED life: >67,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance



## PERFORMANCE


Light source	LED
LED output	2000 - 4050lm
Luminaire output	1640 - 3320lm
Luminaire efficiency	≥108lm/W
CRI	>80
Beam angle	110°

## MATERIALS

Body	Polycarbonate
Finish	White / Silver
Diffuser	Opal polycarbonate TP(a)

## OPTIONS

- > 3hr emergency
- > Microwave sensor for enhanced savings
- > Replacement shade
- > Bluetooth enabled

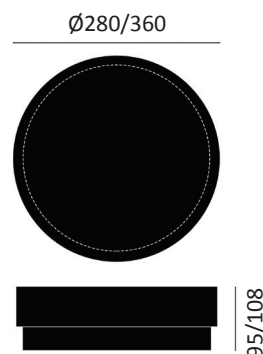

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD		DALI	
				WHITE	SILVER	WHITE	SILVER
15W	3000K	1640lm	Ø280 x 95	42200101	42200301	42200103	42200303
15W	4000K	1730lm	Ø280 x 95	42200201	42200401	42200203	42200403
20W	3000K	2120lm	Ø280 x 95	42200501	42200701	42200503	42200703
20W	4000K	2210lm	Ø280 x 95	42200601	42200801	42200603	42200803
21W	3000K	2270lm	Ø360 x 108	42200901	42201101	42200903	42201103
21W	4000K	2390lm	Ø360 x 108	42201001	42201201	42201003	42201203
29W	3000K	3180lm	Ø360 x 108	42201301	42201501	42201303	42201503
29W	4000K	3320lm	Ø360 x 108	42201401	42201601	42201403	42201603


## FEATURES & BENEFITS

- > Robust design with captive screws
- > No spotting - even light distribution
- > Long rated LED life: >51,000hrs (L90/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance
- > UV stabilised - no yellowing



## PERFORMANCE

Light source	LED
LED output	2540 - 3710lm
Luminaire output	2110 - 3130lm
Luminaire efficiency	≥123lm/W
CRI	>80

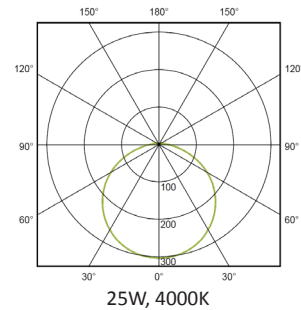


## MATERIALS

Body	Polycarbonate
Finish	White
Diffuser	Opal polycarbonate TP(a)

## OPTIONS

- > Microwave sensor for enhanced energy savings
- > Grey body
- > Bluetooth enabled
- > Internal fuse and LSOH cable

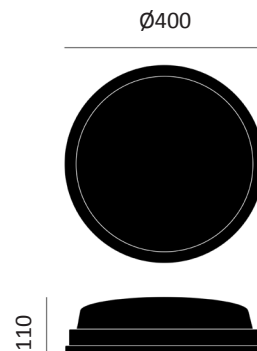

LAMP	COLOUR TEMP	DELIVERED LUMENS	FINISH	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
17W	3000K	2110lm	White	41000501	-	41000591	-
17W	4000K	2140lm	White	41000601	-	41000691	-
25W	3000K	3070lm	White	41000701	41000703	41000791	41000793
25W	4000K	3130lm	White	41000801	41000803	41000891	41000893



IP65 IK10 CLASS I CE

# WARRIOR LED

A vandal resistant, IP65 LED bulkhead available with optional anti-graffiti protection.

Suitable for passageways and building facades and is available with a microwave sensor for enhanced energy savings.

# WARRIOR LED

## FEATURES & BENEFITS

- > Robust, solid design
- > UV stabilised
- > Average rated LED life: >50,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance

## PERFORMANCE



Light source	LED
LED output	2590 - 2700lm
Luminaire output	1920 - 2000lm
Luminaire efficiency	≥100lm/W
CRI	>80

## MATERIALS

Body	Die-cast aluminium
Finish	Black
Diffuser	Opal polycarbonate TP(a)

## OPTIONS

- > Silver finish
- > Microwave sensor for enhanced energy savings
- > Anti-graffiti protection (30% gloss)
- > Bluetooth enabled
- > Internal fuse and LSOH cable

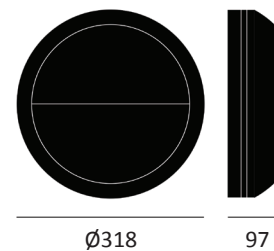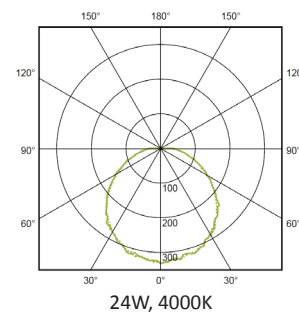

LAMP	COLOUR TEMP	DELIVERED LUMENS	STYLE	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
20W	3000K	1920lm	Opal	41202101	41202103	41202191	41202193
20W	4000K	2000lm	Opal	41202201	41202203	41202291	41202293
20W	3000K	1920lm	Eyelid	41202301	41202303	41202391	41202393
20W	4000K	2000lm	Eyelid	41202401	41202403	41202491	41202493



# RONDO LED

IP66 IK10<sup>+</sup> CLASS I  
850° CE

## FEATURES & BENEFITS

- > Robust design - non-corrosive and abrasion resistant
- > Exceptionally high impact resistance: IK10+ / 120 joules
- > Rip-out resistant skirt - capable of withstanding severe vandalism.
- > Average 50,000h LED life (L80/B50) - no maintenance
- > Optimum colour consistency—3 step MacAdam ellipse tolerance
- > Photobiological hazard: RG0




## PERFORMANCE

Light source	LED
Luminaire output	1500 - 2550lm
Luminaire efficiency	≥121lm/W
CRI	>80


## MATERIALS

Body	Die-cast aluminium, marine grade
Finish	White (RAL 9016)/Grey (RAL 9006) /
Diffuser	Black (RAL 9005)
External fixings	Opal polycarbonate, 3.5mm thick M5 stainless steel tamper-proof crosshead screws
Wiring	2 x side Ø20.5mm cable entry

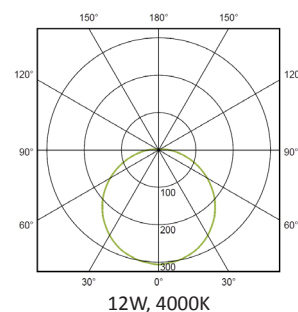

## OPTIONS

- > 3hr emergency
- > Microwave sensor for enhanced energy savings
- > Bluetooth enabled
- > Flush mounted version
- > Slave version

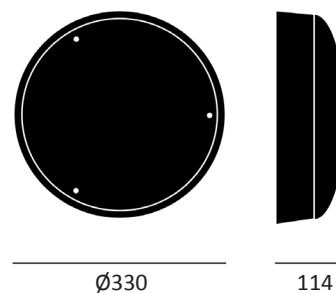

LAMP	COLOUR TEMP	DELIVERED LUMENS	STANDARD			DALI		
			WHITE	GREY	BLACK	WHITE	GREY	BLACK
12W	3000K	1500lm	43300101	43300301	43300501	43300103	43300303	43300503
12W	4000K	1550lm	43300201	43300401	43300601	43300203	43300403	43300603
17W	3000K	2050lm	43300701	43300901	43301101	43300703	43300903	43301103
17W	4000K	2150lm	43300801	43301001	43301201	43300803	43301003	43301203
20W	3000K	2450lm	43301301	43301501	43301701	43301303	43301503	43301703
20W	4000K	2550lm	43301401	43301601	43301801	43301403	43301603	43301803

## FEATURES & BENEFITS

- > Attractive modern design
- > Long rated LED life: >54,000hrs (L90/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance

## PERFORMANCE



Light source	LED
LED output	1440 - 11340lm
Luminaire output	790 - 8280lm
Luminaire efficiency	≥79lm/W
CRI	83
Beam angle	110°

## MATERIALS

Body	Aluminium
Finish	Grey
Diffuser	Opal PMMA

## OPTIONS

- > Other RAL colours available
- > Suspension kit ( x3 -1.5m standard length)
- > Microprism / opal polycarbonate diffuser
- > Bluetooth enabled
- > Internal fuse and LSOH cable

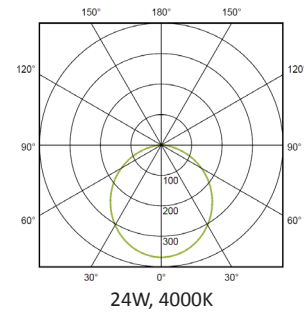

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
10W	3000K	790lm	Ø320x69	60604401	60604403	60604491	60604493
10W	4000K	810lm	Ø320x69	60604501	60604503	60604591	60604593
21W	3000K	1720lm	Ø320x69	60604601	60604603	60604691	60604693
21W	4000K	1750lm	Ø320x69	60604701	60604703	60604791	60604793
24W	3000K	2500lm	Ø440x69	60604801	60604803	60604891	60604893
24W	4000K	2550lm	Ø440x69	60604901	60604903	60604991	60604993
34W	3000K	3750lm	Ø440x69	60605001	60605003	60605091	60605093
34W	4000K	3830lm	Ø440x69	60605101	60605103	60605191	60605193
34W	3000K	3840lm	Ø520x69	60605201	60605203	60605291	60605293
34W	4000K	3920lm	Ø520x69	60605301	60605303	60605391	60605393
46W	3000K	4650lm	Ø800x110	60605401	60605403	60605491	60605493
46W	4000K	4740lm	Ø800x110	60605501	60605503	60605591	60605593
77W	3000K	8120lm	Ø1065x125	60605601	60605603	60605691	60605693
77W	4000K	8280lm	Ø1065x125	60605701	60605703	60605791	60605793

# CUBO LED

IP20

CLASS  
I

C E

A contemporary, square LED luminaire with clean strong lines that can be surface or suspension mounted. Suitable for a wide range of environments.


## FEATURES & BENEFITS

- > Attractive design suitable for walls or ceilings
- > No spotting - even light distribution
- > Long rated LED life: >54,000hrs (L90/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance



## PERFORMANCE

Light source	LED
LED output	2670 - 4280lm
Luminaire output	1660 - 2950lm
Luminaire efficiency	≥87lm/W
CRI	83

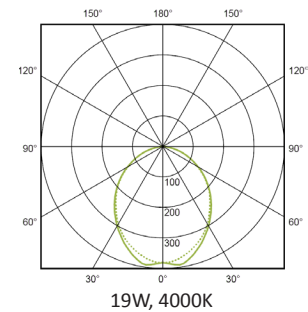


## MATERIALS

Body	Sheet steel
Finish	Grey
Diffuser	Opal PMMA

## OPTIONS

- > Other RAL colours available
- > Available as a pendant
- > Microwave sensor for enhanced energy savings
- > Other sizes available 595x595 / 295x1195
- > Bluetooth enabled
- > Slim trim version
- > Internal fuse and LSOH cable
- > Opal polycarbonate diffuser

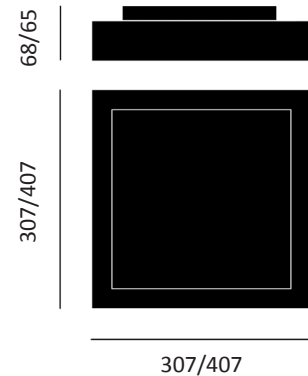

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD	DALI	EMERGENCY STANDARD	DALI
19W	3000K	1660lm	307x307x65	41603701	41603703	41603791	41603793
19W	4000K	1710lm	307x307x65	41603801	41603803	41603891	41603893
38W	3000K	3430lm	407x407x65	41603901	41603903	41603991	41603993
38W	4000K	3500lm	407x407x65	41604001	41604003	41604091	41604093
32W	3000K	2890lm	407x407x65	41604101	41604103	41604191	41604193
32W	4000K	2950lm	407x407x65	41604201	41604203	41604291	41604293

# TILIA LED




## FEATURES & BENEFITS

- > Vandal resistant
- > Available in various lumen outputs and sizes
- > Long rated LED life: >67,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance



## PERFORMANCE

Light source	LED
LED output	2460 - 10200lm
Luminaire output	1750 - 6830lm
Luminaire efficiency	≥89lm/W
CRI	>80
Beam angle	110°

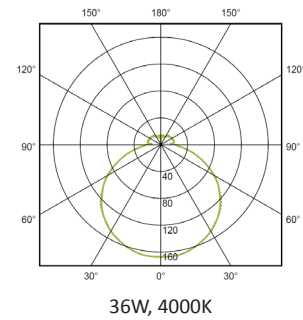


## MATERIALS

Body	Sheet steel
Finish	White
Diffuser	Opal polycarbonate TP(a)

## OPTIONS

- > Microwave sensor for enhanced energy savings
- > Bluetooth enabled
- > Replacement shade
- > Triple layer matt glass diffuser

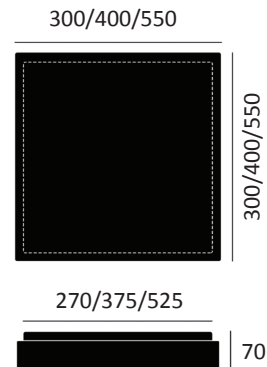

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
19W	3000K	1750lm	300x300	42500101	42500103	42500191	42500193
19W	4000K	1840lm	300x300	42500201	42500203	42500291	42500293
25W	3000K	2290lm	300x300	42500301	42500303	42500391	42500393
25W	4000K	2400lm	300x300	42500401	42500403	42500491	42500493
28W	3000K	2470lm	400x400	42500501	42500503	42500591	42500593
28W	4000K	2610lm	400x400	42500601	42500603	42500691	42500693
36W	3000K	3250lm	400x400	42500701	42500703	42500791	42500793
36W	4000K	3400lm	400x400	42500801	42500803	42500891	42500893
36W	3000K	3450lm	550x550	42500901	42500903	42500991	42500993
36W	4000K	3640lm	550x550	42501001	42501003	42501091	42501093
75W	3000K	6480lm	550x550	42501101	42501103	42501191	42501193
75W	4000K	6830lm	550x550	42501201	42501203	42501291	42501293

## CORONET LED



## FEATURES &amp; BENEFITS

- > UV resistant
- > Average rated LED life: >50,000hrs (L70/B50)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance
- > High impact resistance

## PERFORMANCE



Light source	LED
Luminaire output	800 – 1750lm
Luminaire efficiency	≥88lm/W
CRI	>80
Beam angle	110°

## MATERIALS

Body	Acrylic
Finish	White / Black / Satin silver
Diffuser	Opal polycarbonate TP(a)

## OPTIONS

- > Microwave sensor for enhanced energy savings
- > Bluetooth enabled
- > Internal fuse and LSOH cable

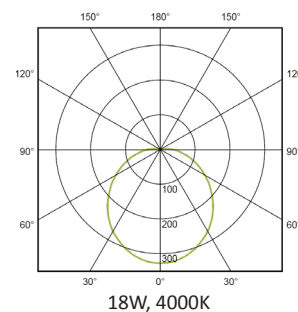

# CORONET LED

LAMP	COLOUR TEMP	DELIVERED LUMENS	FINISH	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
9W	3000K	800lm	White	41107001	41107003	41107091	41107093
9W	4000K	870lm	White	71107101	71107103	71107191	71107193
9W	3000K	800lm	Black	71107201	71107203	71107291	71107293
9W	4000K	870lm	Black	71107301	71107303	71107391	71107393
9W	3000K	800lm	Satin silver	71107401	71107403	71107491	71107493
9W	4000K	870lm	Satin silver	41107501	41107503	41107591	41107593
14W	3000K	1300lm	White	41107601	41107603	41107691	41107693
14W	4000K	1400lm	White	41107701	41107703	41107791	41107793
14W	3000K	1300lm	Black	41107801	41107803	41107891	41107893
14W	4000K	1400lm	Black	41107901	41107903	41107991	41107993
14W	3000K	1300lm	Satin silver	41108001	41108003	41108091	41108093
14W	4000K	1400lm	Satin silver	41108101	41108103	41108191	41108193
18W	3000K	1650lm	White	41108201	41108203	41108291	41108293
18W	4000K	1750lm	White	41108301	41108303	41108391	41108393
18W	3000K	1650lm	Black	41108401	41108403	41108491	41108493
18W	4000K	1750lm	Black	41108501	41108503	41108591	41108593
18W	3000K	1650lm	Satin silver	41108601	41108603	41108691	41108693
18W	4000K	1750lm	Satin silver	41108701	41108703	41108791	41108793



# INCA LED

IP54 IK10 CLASS I CE

## FEATURES & BENEFITS

- > Cost effective, general purpose bulkhead
- > No spotting - even light distribution
- > Long rated LED life: >54,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance
- > UV stabilised - no yellowing




## PERFORMANCE

Light source	LED
LED output	2460 - 2540lm
Luminaire output	2070 - 2130lm
Luminaire efficiency	≥115lm/W
CRI	>80


## MATERIALS

Body	Polycarbonate
Finish	White / Grey
Diffuser	Opal polycarbonate TP(a)

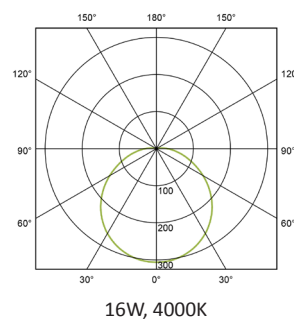

## OPTIONS

- > Microwave sensor for enhanced energy savings
- > Bluetooth enabled
- > Internal fuse and LSOH cable

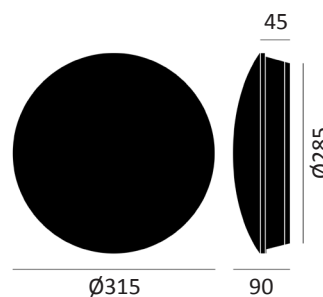

LAMP	COLOUR TEMP	DELIVERED LUMENS	FINISH	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
16W	3000K	2070lm	White	40903001	40903003	40903091	40903093
16W	4000K	2130lm	White	40903101	40903103	40903191	40903193
16W	3000K	2070lm	Grey	40903201	40903203	40903291	40903293
16W	4000K	2130lm	Grey	40903301	40903303	40903391	40903393

# ELSA LED



## FEATURES & BENEFITS

- > Homogeneous light distribution
- > Long rated LED life: >67,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance

## PERFORMANCE


Light source	LED
LED output	1450 - 7150lm
Luminaire output	1060 - 4650lm
Luminaire efficiency	≥83lm/W
CRI	>80

## MATERIALS


Body	Sheet steel
Finish	White
Diffuser	Triple layer matt opal glass

## OPTIONS


- > Microwave sensor for enhanced energy savings
- > Replacement shade
- > Decorative trims - white/brass/polished stainless steel
- > Bluetooth enabled
- > Ø250mm version
- > Semi-recessed version

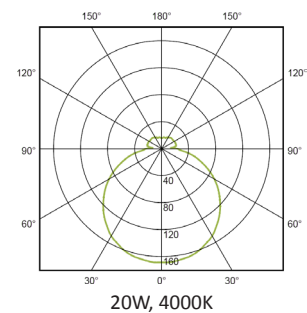

Ø300/360/420/500/590



Ø285/345/415/465



86/  
88/90/  
92/94



# ELSA LED

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD	DALI	EMERGENCY STANDARD	DALI
11W	3000K	1060lm	Ø300 x 86	42800501	42800503	42800591	42800593
11W	4000K	1120lm	Ø300 x 86	42800601	42800603	42800691	42800693
15W	3000K	1420lm	Ø300 x 86	42800701	42800703	42800791	42800793
15W	4000K	1500lm	Ø300 x 86	42800801	42800803	42800891	42800893
15W	3000K	1400lm	Ø360 x 88	42800901	42800903	42800991	42800993
15W	4000K	1480lm	Ø360 x 88	42801001	42801003	42801091	42801093
20W	3000K	1810lm	Ø360 x 88	42801101	42801103	42801191	42801193
20W	4000K	1890lm	Ø360 x 88	42801201	42801203	42801291	42801293
21W	3000K	1860lm	Ø420 x 90	42801301	42801303	42801391	42801393
21W	4000K	1960lm	Ø420 x 90	42801401	42801403	42801491	42801493
29W	3000K	2600lm	Ø420 x 90	42801501	42801503	42801591	42801593
29W	4000K	2710lm	Ø420 x 90	42801601	42801603	42801691	42801693
28W	3000K	2400lm	Ø500 x 92	42801701	42801703	42801791	42801793
28W	4000K	2530lm	Ø500 x 92	42801801	42801803	42801891	42801893
36W	3000K	3150lm	Ø500 x 92	42801901	42801903	42801991	42801993
36W	4000K	3300lm	Ø500 x 92	42802001	42802003	42802091	42802093
35W	3000K	3090lm	Ø590 x 94	42802101	42802103	42802191	42802193
35W	4000K	3260lm	Ø590 x 94	42802201	42802203	42802291	42802293
53W	3000K	4410lm	Ø590 x 94	42802301	42802303	42802391	42802393
53W	4000K	4650lm	Ø590 x 94	42802401	42802403	42802491	42802493



IP20 CLASS I CE

# SATURN LED

A stunning, surface wall or ceiling mounted LED luminaire with a triple layer mouth blown glass diffuser. Available with a matching pendant.

# SATURN LED

## FEATURES & BENEFITS

- > Distinctive eye-catching doughnut design
- > Stunning mouth-blown glass diffuser
- > Matching LED pendant available
- > Long rated LED life: >114,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance

## PERFORMANCE



Light source	LED
LED output	2270 - 4460lm
Luminaire output	1540 - 3030lm
Luminaire efficiency	≥86lm/W
CRI	>80

## MATERIALS

Body	Sheet steel
Finish	White
Diffuser	Triple layer matt opal glass

## OPTIONS

- > Replacement shade
- > Bluetooth enabled (larger size only)
- > Class II

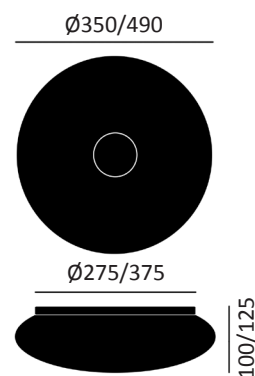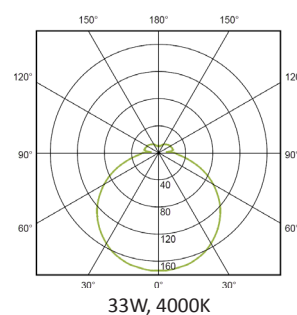

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD	DALI
18W	3000K	1540lm	Ø350 x 100	42300101	42300103
18W	4000K	1630lm	Ø350 x 100	42300201	42300203
33W	3000K	2880lm	Ø490 x 125	42300301	42300303
33W	4000K	3030lm	Ø490 x 125	42300401	42300403



# AURA LED

A stunning, surface wall or ceiling mounted LED luminaire with a triple layer mouth blown glass diffuser. Available with a matching pendant.

# AURA LED


## FEATURES & BENEFITS

- > Homogenous light distribution
- > Available in various lumen outputs and sizes for design flexibility
- > Average rated LED life: >67,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam chromaticity tolerance



## PERFORMANCE

Light source	LED
LED output	2000 - 4050lm
Luminaire output	1360 - 3000lm
Luminaire efficiency	≥88lm/W
CRI	>80
Beam angle	110°

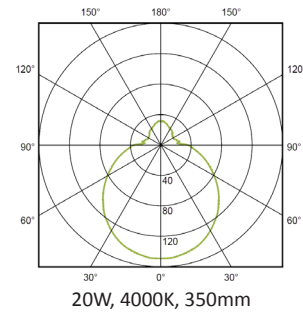


## MATERIALS

Body	Sheet steel
Finish	White
Diffuser	Triple layer matt opal glass

## OPTIONS

- > Decorative trims
- > Replacement shade
- > Bluetooth enabled
- > Matching pendant
- > Other sizes available  $\varnothing 280/\varnothing 490/\varnothing 590$

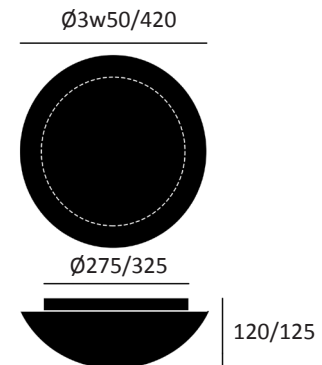

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
15W	3000K	1360lm	Ø350 x 120	43400701	43400703	43400791	43400793
15W	4000K	1430lm	Ø350 x 120	43400801	43400803	43400891	43400893
20W	3000K	1760lm	Ø350 x 120	43400901	43400903	43400991	43400993
20W	4000K	1840lm	Ø350 x 120	43401001	43401003	43401091	43401093
21W	3000K	2050lm	Ø420 x 125	43401101	43401103	43401191	43401193
21W	4000K	2160lm	Ø420 x 125	43401201	43401203	43401291	43401293
29W	3000K	2870lm	Ø420 x 125	43401301	43401303	43401391	43401393
29W	4000K	3000lm	Ø420 x 125	43401401	43401403	43401491	43401493



IP54

IK10

CLASS  
I

CE

# DELIA LED

A flat, elegant, circular LED luminaire available in a high-quality polycarbonate or optional glass diffuser.

Available in a diameter up to 900mm and in multiple outputs, the Delia is extremely versatile and would complement any interior design.

# DELIA LED


## FEATURES & BENEFITS

- > Modern design
- > Long rated LED life: >67,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance
- > Available in various lumen outputs and sizes
- > Complementary pendant luminaires



## PERFORMANCE

Light source	LED
LED output	2000 - 7150lm
Luminaire output	1480 - 4720lm
Luminaire efficiency	≥84lm/W
CRI	>80
Beam angle	110 degree

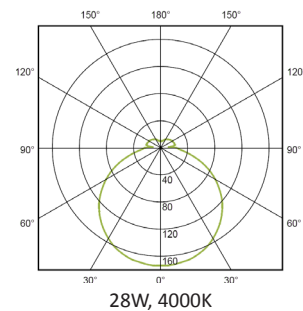


## MATERIALS

Body	Sheet steel
Finish	White
Diffuser	Opal polycarbonate TP(a)

## OPTIONS

- > Microwave sensor for enhanced energy savings
- > Ø650mm and Ø900mm sizes (up to 21150lm)
- > Replacement shade
- > Matching pendant
- > Bluetooth enabled

Ø300/400/500



Ø275/375/465

75/80/85

LAMP	COLOUR TEMP	DELIVERED LUMENS	DIMENSIONS	STANDARD	DALI	EMERGENCY	
						STANDARD	DALI
15W	3000K	1480lm	Ø300x75	42100101	42100103	42100191	42100193
15W	4000K	1560lm	Ø300x75	42100201	42100203	42100291	42100293
20W	3000K	1920lm	Ø300x75	42100301	42100303	42100391	42100393
20W	4000K	2000lm	Ø300x75	42100401	42100403	42100491	42100493
28W	3000K	2580lm	Ø400x80	42100501	42100503	42100591	42100593
28W	4000K	2720lm	Ø400x80	42100601	42100603	42100691	42100693
36W	3000K	3400lm	Ø400x80	42100701	42100703	42100791	42100793
36W	4000K	3550lm	Ø400x80	42100801	42100803	42100891	42100893
35W	3000K	3140lm	Ø500x85	42100901	42100903	42100991	42100993
35W	4000K	3310lm	Ø500x85	42101001	42101003	42101091	42101093
53W	3000K	4470lm	Ø500x85	42101101	42101103	42101191	42101193
53W	4000K	4720lm	Ø500x85	42101201	42101203	42101291	42101293