

GOLF 57 TRACK

IP20 CLASS I F MARK CE

A three circuit track mounted profile LED range designed to complement the surface, suspended, recessed and track mounted Golf 57 LED.

FEATURES & BENEFITS

- > Multiple lengths and finishes available
- > Average 54,000hrs LED life - (L90/B10) - maintenance free
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance

PERFORMANCE


Light source	LED
Emission	Direct
LED output	1750 - 3560lm
Luminaire output	1129 - 2543lm
CRI	>80

MATERIALS

Body	Extruded aluminium profile
Finish	Grey / White / Black
Diffuser	Opal polycarbonate TP(a)

OPTIONS

- > 3hr emergency (840mm or longer)
- > Other RAL finishes and lengths available
- > Lower output versions
- > 2-step MacAdam, CRI <90
- > Internal fuse and LSOH cables

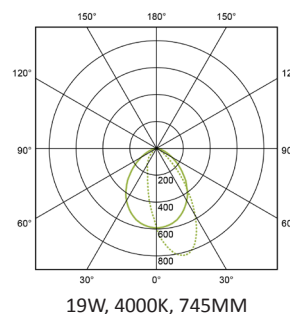

LAMP	COLOUR TEMP	DELIVERED LUMENS	LENGTH	EMISSION	GREY	WHITE	BLACK
13W	3000K	1129lm	545	Direct	27000301	27003901	27007501
13W	4000K	1139lm	545	Direct	27000401	27004001	27007601
19W	3000K	1684lm	745	Direct	27000701	27004301	27007901
19W	4000K	1734lm	745	Direct	27000801	27004401	27008001
20W	3000K	1915lm	840	Direct	27001101	27004701	27008301
20W	4000K	1965lm	840	Direct	27001201	27004801	27008401
25W	3000K	2493lm	1085	Direct	27001501	27005101	27008701
25W	4000K	2543lm	1085	Direct	27001601	27005201	27008801

FOCUS TRACK

FEATURES & BENEFITS

- > Stunning black pearl reflector for aesthetic appeal
- > High visual comfort - exceptionally low glare
- > Cylindrical and cuboid versions available for design flexibility
- > Average rated LED life: >50,000hrs (L80/B10)
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance

PERFORMANCE



Light source	LED
Luminaire output	380 - 1707lm
CRI	90
Beam angle	15° / 24° / 38°
UGR	<19

MATERIALS

Body	Aluminium
Finish	Grey / White / Black
Reflector	Black pearl
Mounting	3-circuit track mounted with adaptor

OPTIONS

- > Triac dimming
- > Other RAL colours and 2700K available
- > Honeycomb, linear spread lens and spread lens accessories
- > Complementary surface wall and ceiling, recessed and suspended luminaires

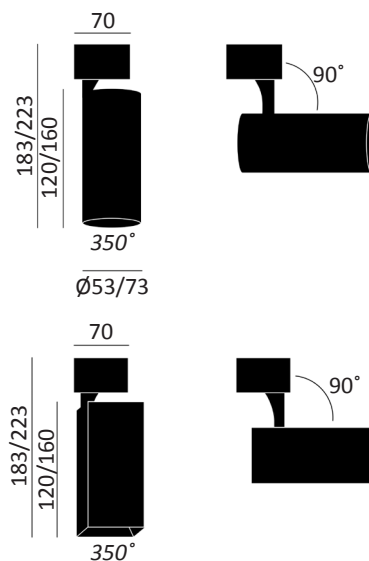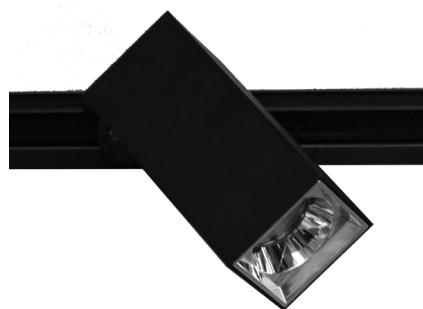

FOCUS TRACK

CYLINDRICAL LUMINAIRE

LAMP	COLOUR TEMP	DELIVERED LUMENS	BEAM	DIMENSIONS	GREY	WHITE	BLACK
7W	3000K	380lm	15°	Ø53 x 120	25300101	25303701	25307301
7W	4000K	412lm	15°	Ø53 x 120	25300201	25303801	25307401
7W	3000K	430lm	24°	Ø53 x 120	25300301	25303901	25307501
7W	4000K	495lm	24°	Ø53 x 120	25300401	25304001	25307601
7W	3000K	420lm	38°	Ø53 x 120	25300501	25304101	25307701
7W	4000K	478lm	38°	Ø53 x 120	25300601	25304201	25307801
10W	3000K	490lm	15°	Ø53 x 120	25300701	25304301	25307901
10W	4000K	532lm	15°	Ø53 x 120	25300801	25304401	25308001
10W	3000K	510lm	24°	Ø53 x 120	25300901	25304501	25308101
10W	4000K	587lm	24°	Ø53 x 120	25301001	25304601	25308201
10W	3000K	530lm	38°	Ø53 x 132	25301101	25304701	25308301
10W	4000K	603lm	38°	Ø53 x 132	25301201	25304801	25308401
15W	3000K	900lm	15°	Ø73 x 160	25301301	25304901	25308501
15W	4000K	977lm	15°	Ø73 x 160	25301401	25305001	25308601
15W	3000K	980lm	24°	Ø73 x 160	25301501	25305101	25308701
15W	4000K	1127lm	24°	Ø73 x 160	25301601	25305201	25308801
15W	3000K	1100lm	38°	Ø73 x 160	25301701	25305301	25308901
15W	4000K	1252lm	38°	Ø73 x 160	25301801	25305401	25309001
20W	3000K	1300lm	15°	Ø73 x 160	25301901	25305501	25309101
20W	4000K	1411lm	15°	Ø73 x 160	25302001	25305601	25309201
20W	3000K	1400lm	24°	Ø73 x 160	25302101	25305701	25309301
20W	4000K	1590lm	24°	Ø73 x 160	25302201	25305801	25309401
20W	3000K	1500lm	38°	Ø73 x 160	25302301	25305901	25309501
20W	4000K	1707lm	38°	Ø73 x 160	25302401	25306001	25309601

FOCUS TRACK

CUBOID LUMINAIRE

LAMP	COLOUR TEMP	DELIVERED LUMENS	BEAM	DIMENSIONS	GREY	WHITE	BLACK
7W	3000K	380lm	15°	53 x 53 x 120	25310901	25314501	25318101
7W	4000K	412lm	15°	53 x 53 x 120	25311001	25314601	25318201
7W	3000K	430lm	24°	53 x 53 x 120	25311101	25314701	25318301
7W	4000K	495lm	24°	53 x 53 x 120	25311201	25314801	25318401
7W	3000K	420lm	38°	53 x 53 x 120	25311301	25314901	25318501
7W	4000K	478lm	38°	53 x 53 x 120	25311401	25315001	25318601
10W	3000K	490lm	15°	53 x 53 x 120	25311501	25315101	25318701
10W	4000K	532lm	15°	53 x 53 x 120	25311601	25315201	25318801
10W	3000K	510lm	24°	53 x 53 x 120	25311701	25315301	25318901
10W	4000K	587lm	24°	53 x 53 x 120	25311801	25315401	25319001
10W	3000K	530lm	38°	∅53 x 132	25311901	25315501	25319101
10W	4000K	603lm	38°	∅53 x 132	25312001	25315601	25319201
15W	3000K	900lm	15°	73 x 73 x 160	25312101	25315701	25319301
15W	4000K	977lm	15°	73 x 73 x 160	25312201	25315801	25319401
15W	3000K	980lm	24°	73 x 73 x 160	25312301	25315901	25319501
15W	4000K	1127lm	24°	73 x 73 x 160	25312401	25316001	25319601
15W	3000K	1100lm	38°	73 x 73 x 160	25312501	25316101	25319701
15W	4000K	1252lm	38°	73 x 73 x 160	25312601	25316201	25319801
20W	3000K	1300lm	15°	73 x 73 x 160	25312701	25316301	25319901
20W	4000K	1411lm	15°	73 x 73 x 160	25312801	25316401	25320001
20W	3000K	1400lm	24°	73 x 73 x 160	25312901	25316501	25320101
20W	4000K	1590lm	24°	73 x 73 x 160	25313001	25316601	25320201
20W	3000K	1500lm	38°	73 x 73 x 160	25313101	25316701	25320301
20W	4000K	1707lm	38°	73 x 73 x 160	25313201	25316801	25320401

POLARIS LED

IP20 CLASS I CE

A general purpose three-circuit track LED luminaire available in multiple outputs, optics and finishes with excellent colour rendering.

FEATURES & BENEFITS

- > 350° rotation in the vertical axis and 90° pivot upwards
- > Average rated LED life: >60,000hrs - (L90/B10) - maintenance free
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance

PERFORMANCE



Light source	LED
LED output	1910 - 3670lm
Luminaire output	1300 - 2540lm
Luminaire efficiency	≥84lm/W
CRI	>80
Beam angle	20° / 45°

MATERIALS

Body	Aluminium
Finish	White / Black
Mounting	Three-circuit track/Surface

OPTIONS

- > CRI>90 for fashion, meat, fish and bread displays



LAMP	COLOUR TEMP	DELIVERED LUMENS	BEAM	TRACK		SURFACE	
				WHITE	BLACK	WHITE	BLACK
15W	3000K	1320lm	20°	26300101	26301301	26302501	26303701
15W	4000K	1360lm	20°	26300201	26301401	26302601	26303801
15W	3000K	1300lm	45°	26300301	26301501	26302701	26303901
15W	4000K	1340lm	45°	26300401	26301601	26302801	26304001
21W	3000K	1810lm	20°	26300501	26301701	26302901	26304101
21W	4000K	1870lm	20°	26300601	26301801	26303001	26304201
21W	3000K	1770lm	45°	26300701	26301901	26303101	26304301
21W	4000K	1830lm	45°	26300801	26302001	26303201	26304401
29W	3000K	2460lm	20°	26300901	26302101	26303301	26304501
29W	4000K	2540lm	20°	26301001	26302201	26303401	26304601
29W	3000K	2410lm	45°	26301101	26302301	26303501	26304701
29W	4000K	2490lm	45°	26301201	26302401	26303601	26304801

ELANTRA LED

IP20 CLASS I CE

A compact and cost-effective LED spotlight, adjustable through two axes, which is suitable for track, ceiling or wall mounting. Ideal for galleries and illuminating displays of fish, meat, bread, vegetables and clothing due to its high colour rendering and warm colour temperature options.

FEATURES & BENEFITS

- > Surface or three-circuit track mounted luminaire
- > Adjustable through two axes
- > No UV or IR rays - no discolouration of displays
- > Compact design
- > Average LED life: >60,000hrs - (L80/B10) - maintenance free
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance

PERFORMANCE


Light source	LED
LED output	1000 - 1970lm
Luminaire output	880 - 1720lm
CRI	80 - 95
Beam angle	20° / 30° / 50°

MATERIALS


Body	Aluminium
Finish	Grey
Diffuser	Transparent tempered glass
Mounting	Three-circuit track / Surface (wall or ceiling) with a base

OPTIONS

- > Other RAL colours
- > 2-step MacAdam ellipse tolerance
- > Three circuit track



14W, 2700K



ELANTRA LED

LAMP	COLOUR TEMP	CRI	DELIVERED LUMENS	BEAM	APPLICATION	TRACK	SURFACE
14W	1750K	80	880lm	20°	Meat	23302501	23303701
14W	2700K	80	1310lm	20°	Bread	23302601	23303801
14W	2700K	95	1060lm	20°	Museums	23302701	23303901
14W	4000K	90	1640lm	20°	Fish/Clothing/Veg	23302801	23304001
14W	1750K	80	880lm	30°	Meat	23302901	23304101
14W	2700K	80	1390lm	30°	Bread	23303001	23304201
14W	2700K	95	1110lm	30°	Museums	23303101	23304301
14W	4000K	90	1720lm	30°	Fish/Clothing/Veg	23303201	23304401
14W	1750K	80	880lm	50°	Meat	23303301	23304501
14W	2700K	80	1390lm	50°	Bread	23303401	23304601
14W	2700K	95	1110lm	50°	Museums	23303501	23304701
14W	4000K	90	1720lm	50°	Fish/Clothing/Veg	23303601	23304801



CYLINDER MONO

IP20 CLASS I F MARK C E

A cost-effective, yet high performance, single spotlight designed for three circuit track mounting.

FEATURES AND BENEFITS

- > Average LED life: >50,000hrs - (L70) - maintenance free
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance

PERFORMANCE



Light source	LED (Bridgelux)
LED output	1811 - 1865lm
Luminaire output	1449 - 1492lm
CRI	>80
Beam angle	13° / 28° / 48°

MATERIALS

Body	Extruded aluminium
Finish	Silver / White / Black
Reflector	Aluminium coated polycarbonate with protective lacquer
Diffuser	Clear glass

OPTIONS

- > CRI>90
- > Dimming options
- > Surface (wall & ceiling) version

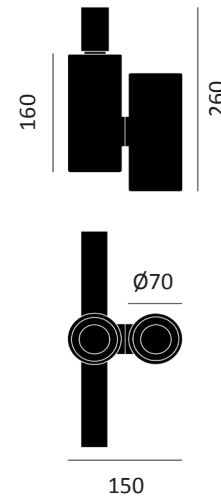

LAMP	COLOUR TEMP	DELIVERED LUMENS	BEAM	SILVER	WHITE	BLACK
13W	3000K	1449lm	13°	26200101	26200701	26201301
13W	4000K	1492lm	13°	26200201	26200801	26201401
13W	3000K	1449lm	28°	26200301	26200901	26201501
13W	4000K	1492lm	28°	26200401	26201001	26201601
13W	3000K	1449lm	48°	26200501	26201101	26201701
13W	4000K	1492lm	48°	26200601	26201201	26201801

CYLINDER DOUBLE

IP20 CLASS I F MARK CE

A cost-effective, yet high performance, twin spotlight designed for three circuit track mounting.

FEATURES AND BENEFITS

- > Average LED life: >50,000hrs - (L70) - maintenance free
- > Optimum colour consistency - 3 step MacAdam ellipse tolerance

PERFORMANCE



Light source	LED (Bridgelux)
LED output	2 x 1811 - 2 x 1865lm
Luminaire output	2 x 1449 - 2 x 1492lm
CRI	>80
Beam angle	13° / 28° / 48°

MATERIALS

Body	Extruded aluminium
Finish	Silver / White / Black
Reflector	Aluminium coated polycarbonate with protective lacquer
Diffuser	Clear glass

OPTIONS

- > CRI>90
- > Dimming options
- > Surface (wall & ceiling) version

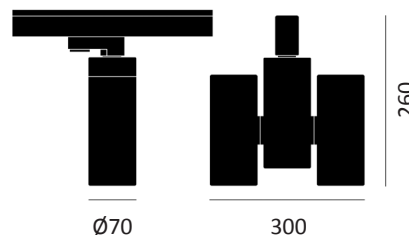

LAMP	COLOUR TEMP	DELIVERED LUMENS	BEAM	SILVER	WHITE	BLACK
2 x 13W	3000K	2 x 1449lm	13°	26201901	26202501	26203101
2 x 13W	4000K	2 x 1492lm	13°	26202001	26202601	26203201
2 X 13W	3000K	2 x 1449lm	28°	26202101	26202701	26203301
2 X 13W	4000K	2 x 1492lm	28°	26202201	26202801	26203401
2 X 13W	3000K	2 x 1449lm	48°	26202301	26202901	26203501
2 X 13W	4000K	2 x 1492lm	48°	26202401	26203001	26203601

THREE CIRCUIT TRACK

FEATURES & BENEFITS

- > Easy to cut with a standard saw
- > No need to cut or bend back conductors
- > Easy to reach pre-punched slotted holes
- > Compatible with Eutrac adaptors

PERFORMANCE




Brand	Eutrac
Voltage rate	230V

MATERIALS



Body	Extruded aluminium
Finish	White / Silver Grey / Black
Diffuser	Copper
	(2x 2.5mm ² cross section conductors)

OPTIONS

- > DALI track
- > 3m / 6.2m suspension steel wire
- > High track

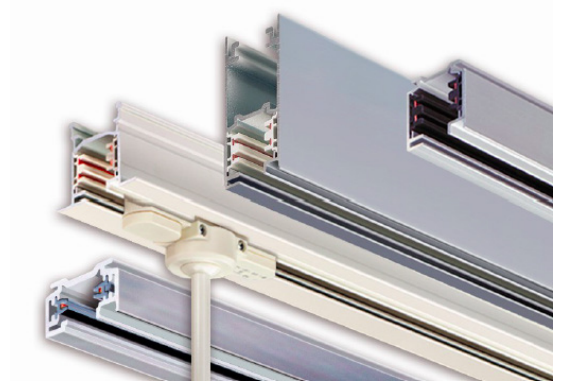

SURFACE MOUNTING
TRACK



RECESSED TRACK

THREE CIRCUIT TRACK

SURFACE MOUNTED TRACK


	LENGTH	WHITE	GREY	BLACK
	1000mm	23002500	23002600	23002700
	2000mm	23002800	23002900	23003000
	3000mm	23003100	23003200	23003300
	Surface monopoints (For 3-circuit adaptors, maximum length of 95mm for loads up to 10Kg. Electrical load max. 250V/16A, with integrated gold plated data bus contacts)	23003400	23003500	23003600
TRACK SYSTEM COMPONENTS				
	End feed, earth right	23003700	23003800	23003900
	End feed, earth left	23004000	23004100	23004200
	End cap	23004300	23004400	23004500
	Mid feed (to be placed anywhere along the track)	23004600	23004700	23004800
	Straight Coupler (To join 2 sections of track electrically. For static reasons, order mechanical coupler if suspended via pendant rod or wire)	23004900	23005000	23005100
	I-coupler (with feeding option)	23005200	23005300	23005400
	L-coupler (with feeding option, earth inside)	23005500	23005600	23005700
	L-coupler (with feeding option, earth outside)	23005800	23005900	23006000
	Flex-coupler (30° to 330° with feeding option)	23006100	23006200	23006300
	T-coupler (with feeding option, earth inside right)	23006400	23006500	23006600
	T-coupler (with feeding option, earth inside left)	23006700	23006800	23006900
	T-coupler (with feeding option, earth outside right)	23007000	23007100	23007200
	T-coupler (with feeding option, earth outside left)	23007300	23007400	23007500
	X-coupler (with feeding option)	23007600	23007700	23007800

THREE CIRCUIT TRACK

SUSPENSION COMPONENTS FOR SURFACE TRACK	WHITE	GREY	BLACK
Suspension steel wire 1.5m	23007900	23008000	23008100
Pendant rod (Ø13mm, length 1.2m cut to exact length on site - to be used with pendant clip or mechanical coupler)	23008200	23008300	23008400
Mechanical coupler (for use with suspension steel wire or pendant rod including M13 x 1 nut)	23008500	23008600	23008700
Pendant clip (inc M13 x 1 nut)	23008800	23008900	23009000
Suspension steel wire with fast hanger (3m, height adjustable)	23009100	23009200	23009300
Fastening clip (for suspension with fast hanger)	23009400	23009500	23009600
Mechanical fastening coupler (for suspension with fast hanger)	23009700	23009800	23009900
Ceiling clip (for ceiling mounting to level uneven ceilings)	23010000	23010100	23010200

THREE CIRCUIT TRACK

RECESSED TRACK



LENGTH	WHITE	BLACK
1000mm	23010300	23010500
2000mm	23010600	23010800
3000mm	23010900	23011100
Recessed housing for surface monopoint Designed for ceiling thicknesses up to 30mm, minimum installation height 75mm. Ceiling cut out Ø126mm. For loads up to 10Kg.)	23011200	23011400
RECESSED TRACK SYSTEM COMPONENTS		
End feed, earth right, ceiling support flange	23011500	23011700
End feed, earth left, ceiling support flange	23011800	23012000
End feed, concealed, flush with profile	23012100	23012300
End cap, ceiling support flange	23012400	23012600
Mid feed (to be placed anywhere along the track)	23012700	23012900
Electrical and mechanical straight coupler (To join two sections of track electrically and mechanically)	23013000	23013200
I-coupler (with feeding option, ceiling support flange)	23013300	23013500
L-coupler (with feeding option, earth inside, ceiling support flange)	23013600	23013800
L-coupler (with feeding option, earth outside, ceiling support flange)	23013900	23014100
T-coupler (with feeding option, earth inside right, ceiling support flange)	23014200	23014400
T-coupler (with feeding option, earth inside left, ceiling support flange)	23014500	23014700
T-coupler (with feeding option, earth outside right, ceiling support flange)	23014800	23015000
T-coupler (with feeding option, earth outside left, ceiling support flange)	23015100	23015300
X-coupler (with feeding option, ceiling support flange)	23015400	23015600


THREE CIRCUIT TRACK

SUSPENSION COMPONENTS FOR RECESSED TRACK

WHITE

Snap hanger (for suspension with fast fixing devices provided on site) 23015700

THREE CIRCUIT TRACK ADAPTORS

WHITE
GREY
BLACK


MultiAdaptor with data bus option

23016000

23016100

23016200

Screw termination, approved for 6A inductive /6A ohmic up to 250V. With earth contact, circuit selection by turnkey switch and optional neutral position during operation. Ideal for heavy spotlights due to double mechanical locking. Maximum load up to 5Kg or 10Kg when using retaining collar 23017800/ 23017900/ 23018000.



Electronic MultiAdaptor LED.30
350mA - 500mA

23016300

23016400

23016500

(For 3-circuit track system with integrated LED driver for constant current. Protection class II / IP20. Lifetime expected up to 100,000hrs, SELV)



Electronic MultiAdaptor LED.30
550mA - 700mA

23016600

23016700

23016800

(For 3-circuit track system with integrated LED driver for constant current. Class II / IP20. Lifetime expected up to 100,000hrs, SELV) (Please see retaining collar accessories below)

RETAINING COLLAR SUITABLE FOR 3-CIRCUIT TRACK ADAPTOR

WHITE
BLACK


Retaining collar with internal thread for pendant rod

M8 x 1

23016900

23017100

M10 x 1

23017200

23017400

M13 x 1

23017500

23017700



Retaining collar with outside thread for pendant rod

M10 x 1

23018100

23018300

M13 x 1

23018400

23018600



Retaining collar for mounting bracket with outside thread M10 x 1, bracket holes Ø10.5 or 13.5mm incl. strain relief

23018700

23018900



Retaining collar (for cable 3 x 0.75mm² or DALI cable incl. strain relief)

23019000

23019200




Retaining collar (for cable 3 x 0.75mm² or DALI cable incl. steel wire. Length: 1.5m for load up to 5Kg, for pendant light fixtures)

23019300


23019500

THREE CIRCUIT TRACK


LOAD INFORMATION—SURFACE TRACK

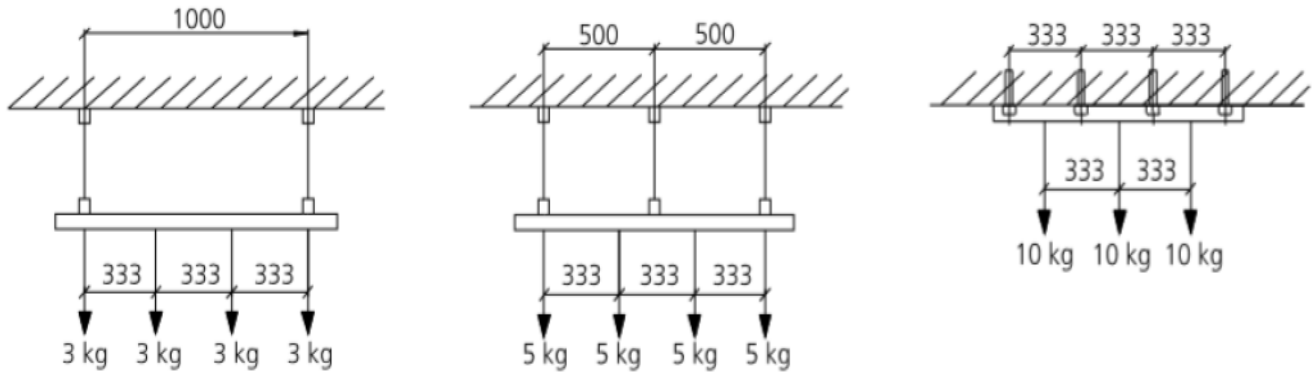

LOAD INFORMATION—RECESSED TRACK

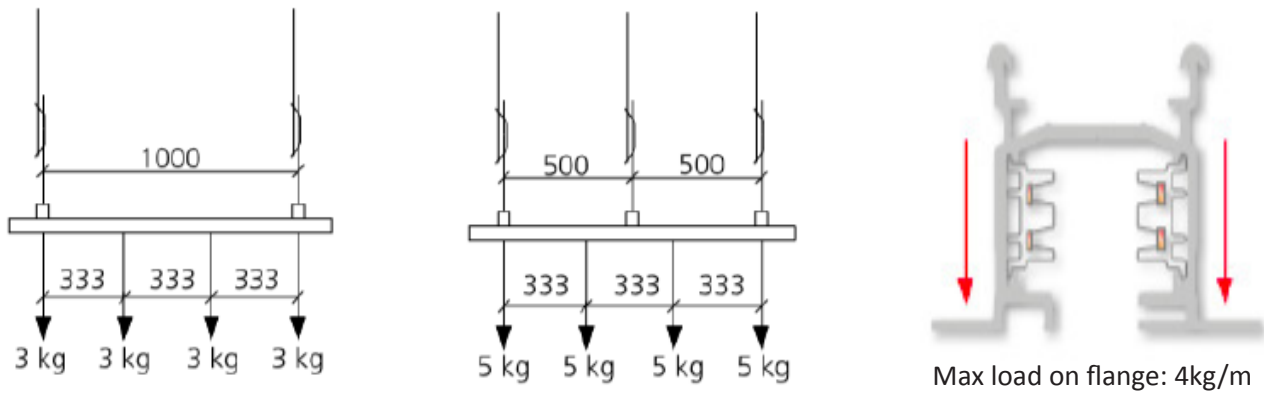

TYPICAL LAYOUT

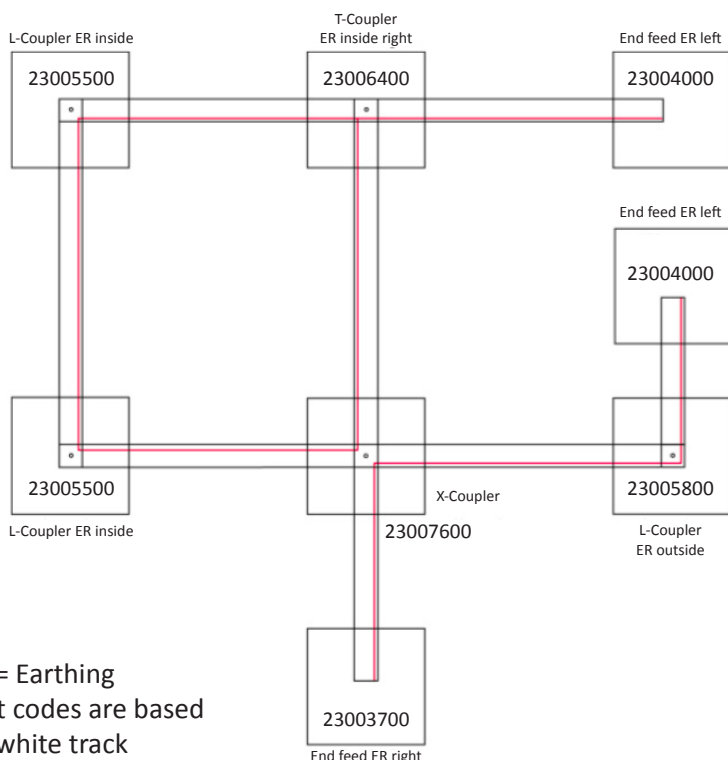

ER = Earthing
Part codes are based
on white track

When planning the layout, you need to consider earth continuity. This track shows the earthing along one inner side of the profile.